
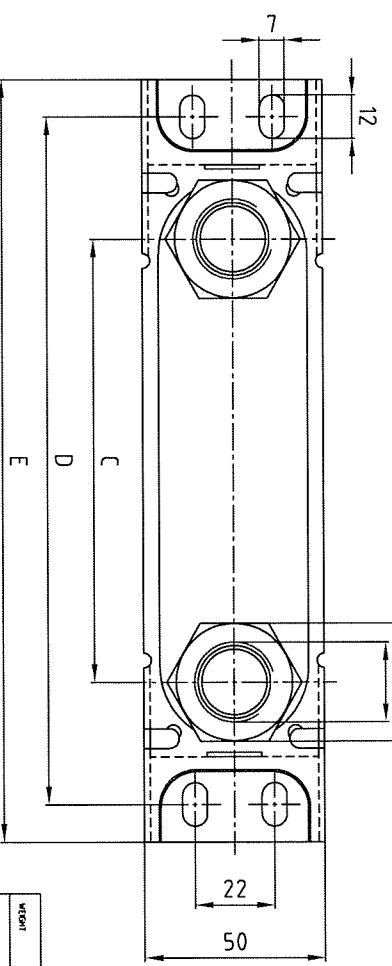
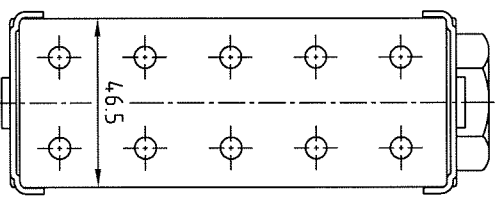


Pro Line - STD

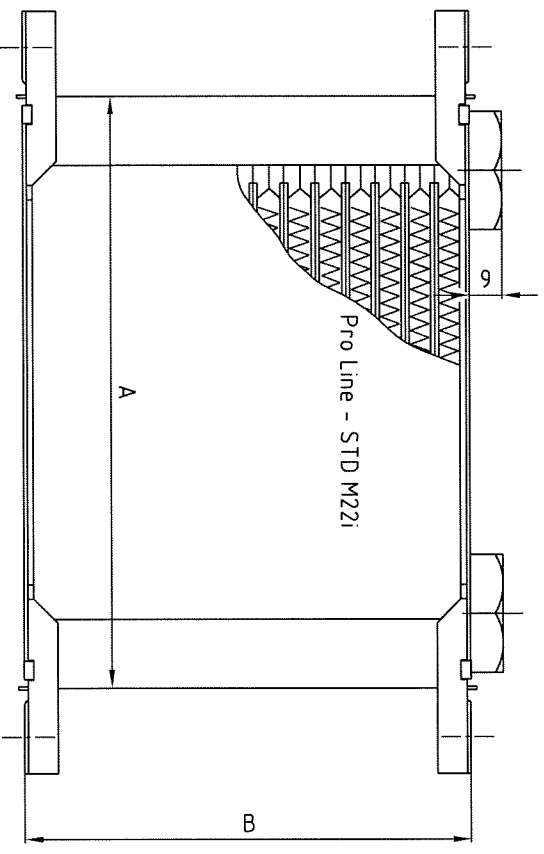

Measure explanation, and Art. No. for Pro Line STD-coolers						
Art. No.	TYPE	A	B	C	D	E
50-107-7612	107	163	52.3±2	122	190	210
50-110-7612	110	163	76.0±2.5	122	190	210
50-113-7612	113	163	99.2±2.5	122	190	210
50-116-7612	116	163	121.9±3	122	190	210
50-119-7612	119	163	145.6±3	122	190	210
50-125-7612	125	163	193.0±3	122	190	210
50-150-7612	150	163	388.5±3	122	190	210
50-607-7612	607	283	52.3±2	242	310	330
50-610-7612	610	283	76.0±2.5	242	310	330
50-613-7612	613	283	99.2±2.5	242	310	330
50-616-7612	616	283	121.9±3	242	310	330
50-619-7612	619	283	145.6±3	242	310	330
50-625-7612	625	283	193.0±3	242	310	330
50-634-7612	634	283	263.6±3	242	310	330
50-640-7612	640	283	310.0±3	242	310	330
50-910-7612	910	358	76.0±2.5	317	385	405
50-915-7612	915	358	115.0±2.5	317	385	405
50-919-7612	919	358	145.6±3	317	385	405
50-925-7612	925	358	193.0±3	317	385	405

TOLERANCE CLASS: ISO 2768-V			
PERMISSIBLE DEVIATIONS FOR LINEAR DIMENSIONS EXCEPT FOR BROKEN EDGES (mm)			
OVER	UP TO	OVER	UP TO
0.5	3	3	6
up to	3	up to	6
-	3	±0.5	±1
			±1.5
			±2.5
			±4

WEIGHT	
VOLUME	
WORKING MEASURE	10 BAR
MAX MEASURE	12 BAR
TEST MEASURE	4 BAR
ROBUST MEASURE	
TEST ACT TO	
PAINT	BLACK EPOXY
PAINT THICKNESS	100µm ±30µm
CORROSION TEST	4.0h/m
IDENTIFYING MARK	
CONTRACTING PARTS MUST BE USED WHEN IDENTIFYING CONNECTIONS	

FINISH	C/4
DRAMA	001102
DATE/FORM	HAS
POS. NO.	
QTY	
REVISION	
APPROVAL	
DATE/FORM	
DESCRIPTION	STD/M22i
QUALITY	
PROD	
TOOLING	
CUSTOMER	Pro Line
OIL COOLER	
Name - Sweden Tel: +46 800 00000 Fax: +46 800 00000	
Setrab OilCoolers	
DRAWING NO.	Pro Line - STD
REMARKS	
TOLERANCES UNLESS NOT SPECIFIED	ISO 2768-V
REPLACES	
REFLECTED DRAWINGS	
SCALE	
DATE	
SSK	